

4way valves for suction vehicles

INSTALLATION
OPERATION
MAINTENANCE



ATEX APPROVED



MODELS:
DN80
DN100
DN125

Table of contents

Page	Chapter
3	1
3	Introduction
3	1.1 Declaration of Conformity
4	1.2 Digital services
4	1.3 Foreword
4	1.4 Explanation of warning symbols
4	1.5 ATEX Directive 2014/34/EU (ATEX approved only)
4	1.6 Field of application
5	2
5	Technical data
5	2.1 Dimensions with pneumatic actuator and with and without feedback box
6	2.2 Dimensions - With handle bar
7	2.3 Specifications
7	2.4 Operating the 4way valve
7	2.5 Storage
7	2.6 Handling and transport
7	2.7 Materials
8	3
8	Vehicle integration & installation
8	3.1 Pneumatic actuator positions
9	3.2 Adjusting the actuator positioning
10	3.3 Positions - Pneumatic actuator
10	3.4 Positions - With handle bar
11	3.5 Placing the 4way valve
11	3.6 Securing the 4way valve
11	3.7 Flange connections
12	4
12	Service, maintenance & inspection intervals
12	4.1 Inspecting for leakage
12	4.2 Inspection and cleaning
12	4.3 Lubrication
12	4.4 Marking and identification

1 Introduction

1.1 Declaration of Conformity



Declaration of Conformity

Annex IIA

Samson Pumps A/S
Petersmindevej 21
DK-8800 Viborg

Hereby declares that the following products:

4-way valve with pneumatic actuator & 3 positioning switch
4-way valve with pneumatic actuator & 3 positioning switch (According to ATEX directive 2014/34/EU)
4-way valve with pneumatic actuator (According to ATEX directive 2014/34/EU)
4-way valve with manual shifting handle (According to ATEX directive 2014/34/EU)
4-way valve only (According to ATEX directive 2014/34/EU)

Conforms to the following directives:

Machinery Directive 2006/42/EC
ATEX Directive 2014/34/EU (ATEX approved products only)

Explosion protection as follows on nameplate:

 II 1G Ex h IIC T4 Ga Internal
 II 2G Ex h IIC T4 Gb External

I hereby declare, that the machine are in conformity with the following harmonized standards:

DS/EN ISO 12100:2011	Safety of machinery - General principles for design - Risk assessment and risk reduction
DS/EN 1127-1:2019	Explosive atmospheres - Explosion prevention and protection - part 1: Basic concepts and methodology
DS/EN ISO 80079-36:2016	Explosive atmospheres - Part 36: Non-electrical equipment for explosive atmospheres - Basic method and requirements
DS/EN ISO 80079-37:2016	Explosive atmospheres - Part 37: Non-electrical equipment for explosive atmospheres - Non-electrical type of protection constructional safety "c", control of ignition sources "b", liquid immersion "k"

The standard above only applies to the extent that it is relevant for the purpose of the product.
 The product must not be used before the complete system, which it must be incorporated in, has been conformity assessed and found to comply with all relevant health and safety requirements of 2006/42/EC and other relevant directives. The product must be included in the overall risk assessment.

EU TYPE-Examination Certificate Number Ex type approval is under preparation
 Certification body Identification Number 2804

Viborg, 23.11.2022


 Jan S. Christiansen – Manager, Technical dept.

1.2 Digital services

Samson Pumps offers a number of digital services to help our customers gain the best possible output from our products.

Calculate



Solution Finder

Buy



Product Center

Learn



How to build

1.3 Foreword

This user manual applies to both ATEX and standard valves.

4way valve DN80 with pneumatic actuator
 4way valve DN80 with handle bar
 4way valve DN100 with pneumatic actuator
 4way valve DN100 with handle bar
 4way valve DN125 with pneumatic actuator
 4way valve DN125 with handle bar

1.4 Explanation of warning symbols

Important technical and safety instructions is showed by symbols. If instructions are not performed correctly, it may lead to personnel injury or incorrect function of the 4-way valve.



To be used with all safety instructions that must be followed. A failure to follow the instructions may result in injuries and/or incorrect machine operation



This symbol stands for safety instructions which – if they are not observed – may lead to a risk of explosion. You must therefore always follow these instructions

1.5 ATEX Directive 2014/34/EU (ATEX approved only)

The 4way valve may be incorporated into a larger system, if the internal atmosphere has an area classification of Zone 0 and external atmosphere classification of Zone 1.

The 4way valve can also be implemented in other ATEX zones, except Zone 0 outside.

These systems must be certified in accordance with the ATEX Directive 2014/34/EU.

For the certification to be valid, the 4-way valve must be installed as described in this manual.

The 4way valve has explosion protection:



II 1G Ex h IIC T4 Ga Internal
 II 2G Ex h IIC T4 Gb External

Explanation of symbols and characters used in ATEX marking:



The European Commission's mark for Ex products

- II** Equipment group II (non-mining)
- 1** Equipment category
- G** Type of explosive atmosphere (G = Gas)
- Ex** Indication of equipment for use in potentially explosive atmospheres
- h** Explosion protection
- IIC** Gas group (explosion group)
- T4** Temperature class (T4 = 135°C)
- Ga** Equipment protection level

1.6 Field of application




Inlet of foreign objects can damage the 4way valve.

The 4way valve may only be used with media that are not aggressive to the valves materials. See section 2.6 for components and appertaining materials. Equipment protection level

2 Technical data


2.1 Dimensions with pneumatic actuator and with and without feedback box

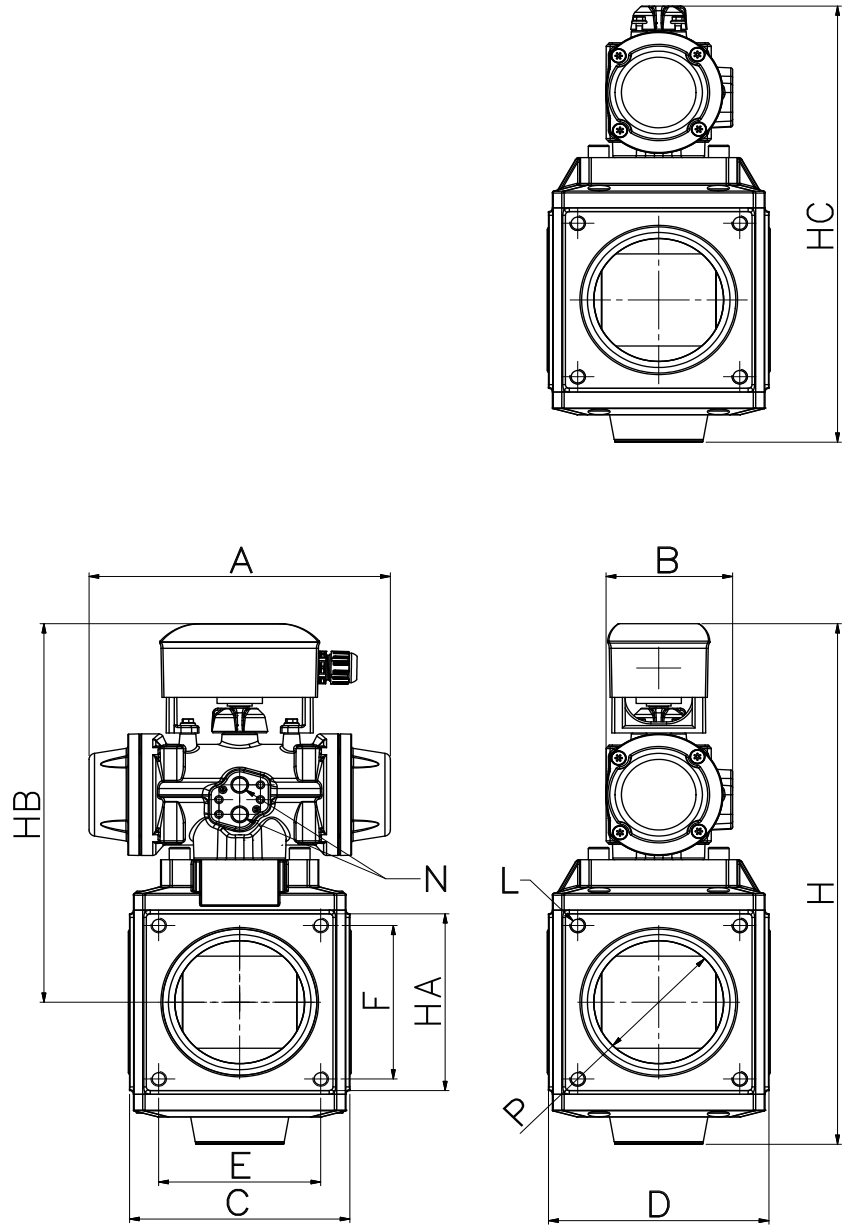

DOC1634896_2B

Model	Vehicle internal pipe system	A	B	C	D	E	F	G	H	HA	HB	HC	K	L	M	N	P	Weight [Kg]
DN80	3"	159	88	135	135	85	85	50	357	104	267	290	14	M10	203	¼"BSPP	75	13 / 14
DN100	4"	230	98	170	170	125	125	70	424	144	308	360	17	M12	248	¼"BSPP	100	24/26
DN125	5"	313	122	216	150	150	150	70	487	185	351	420	22	M12	289	¼"BSPP	125	43 / 46

2.2 Dimensions - With handle bar

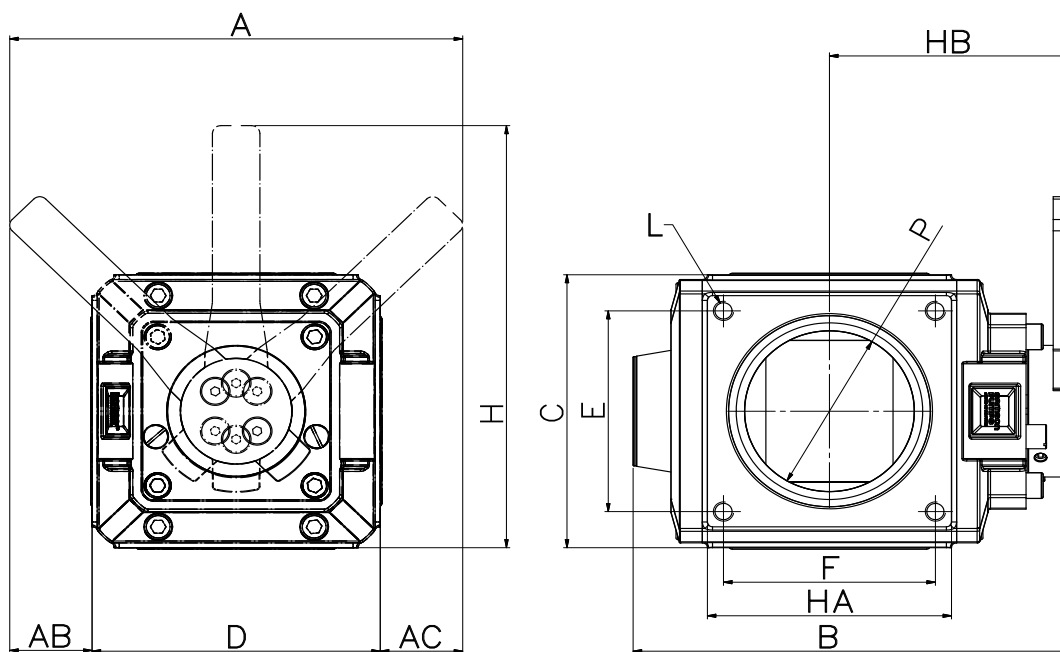

DOC1634897_2A

Model	Vehicle internal pipe system	A	AB	AC	B	C	D	E	F	H	HA	HB	L	P	Weight [Kg]
DN80	3"	247	55	55	218	135	135	85	85	228	104	127	M10	75	14
DN100	4"	280	55	55	263	170	170	125	125	268	144	147	M12	100	25
DN125	5"	325	55	55	303	216	216	150	150	323	185	167	M12	125	44

2.3 Specifications



A failure to meet these specifications may result in damage to the pump and a potential risk of explosion



A failure to meet these specifications may result in damage to the 4way valve

Description	Min	Max
Ambient temperature, operation	-20°C	40°C
Ambient temperature, storage	-20°C	60°C
Working pressure	Full vacuum	3 bar(g)
Test pressure	Full vacuum	16 bar(g)
Pneumatic pressure	6 bar(g)	8 bar(g)

2.4 Operating the 4way valve



The 4way valve may not used if damaged

The 4way valve must be inspected for damages upon delivery. If the 4way valve is damaged, it may not be used and the damage must be reported to the dealer.

2.5 Storage

After operation, the 4way valve can be stored without further action.

2.6 Handling and transport

The 4way valve can be transported in the following ways:


Handling & transport	
Road	 
Sea	 
Air	 

DOC11093A

2.7 Materials

The 4way valve is composed by two main components:

- Pneumatic operated
 - Manually operated
- Pos.1 & Pos.2
 - Pos.1 & Pos.3

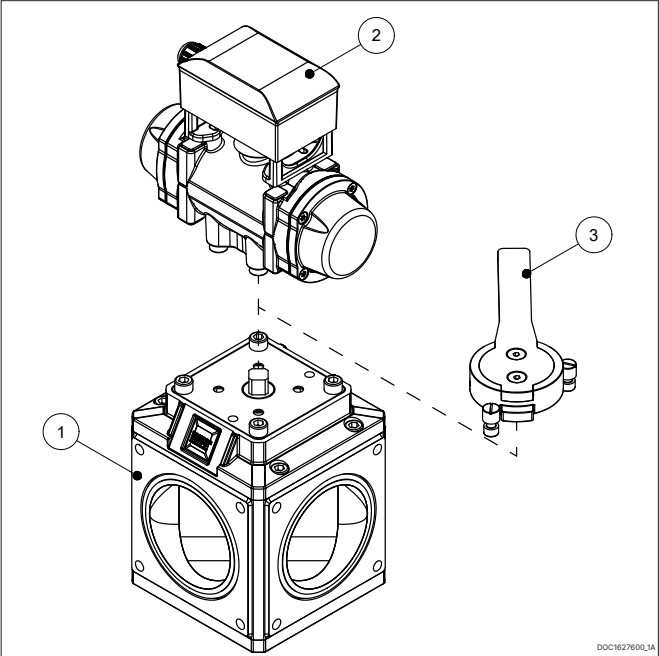


Term	Pos	Material
4way valve	1	Nickel coated cast iron
Actuator set	2	Plastic
Handle bar set	3	Stainless steel

3 Vehicle integration & installation

3.1 Pneumatic actuator positions



The 4-way valve (Pos 1) can be operated with 2 or 3 positions. With 2 positions, the system will function in either suction or discharge mode. The solution may be used together with a stop valve (Pos 2) on the connection pipe, allowing isolation of the pump from the tank.

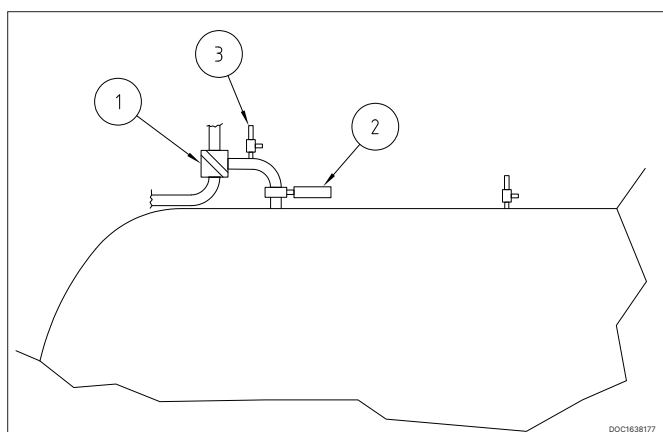

Please ensure the installation of a safety valve (Pos 3) in both the pipe system and the tank. The safety valve in the pipe system should be designed to maintain pressure at safe levels when the pump operates at full speed. The safety valve in the tank serves to prevent pressure build-up due to thermal expansion.

The 4-way valve is available with or without an electrical position box mounted on top. If the box is included in the order, suction and discharge switches can be used to identify the valve position. The pneumatic 5/2-way valve is not included in the delivery.

You can build the system with a 3-position, 4-way valve and a PLC-controlled pneumatic 5/3-way valve. As the valve transitions from suction to discharge or vice versa, it passes the neutral position, which is detected by the electrical position box. If electrical signals to the pneumatic valve are cut, it will move to the closed position, stopping the 4-way valve. Ensure you order the electrical position box with the 4-way valve. Note that the pneumatic 5/3-way valve is not included in the delivery.

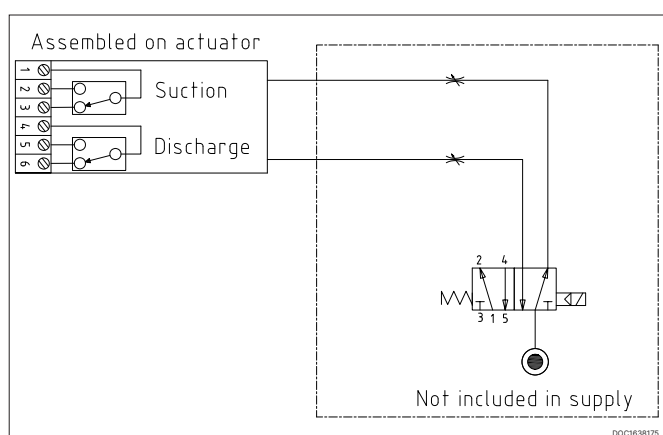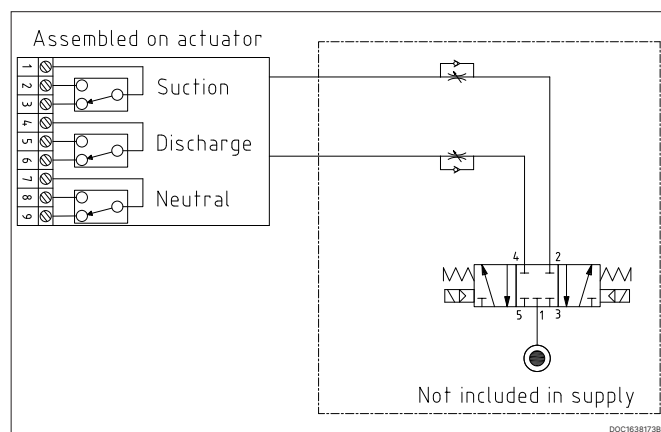


3.2 Adjusting the actuator positioning

The actuator is assembled with a positioning switch. The cams on the camshaft, in the positioning switch, are manually calibrated in order to get signals for suction, neutral and discharge positions. The valve cone position corresponds to the yellow marking on top of camshaft. See illustrations below. (Suction - Neutral - Discharge)

Suction


1. Turn the valve cone CCW to max position.
2. Push the lower cam of the camshaft and turn it CW until the lower micro switch is activated. Release the cam.

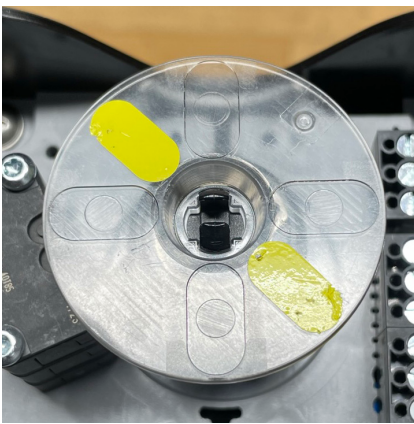

DOC11799




DOC11800

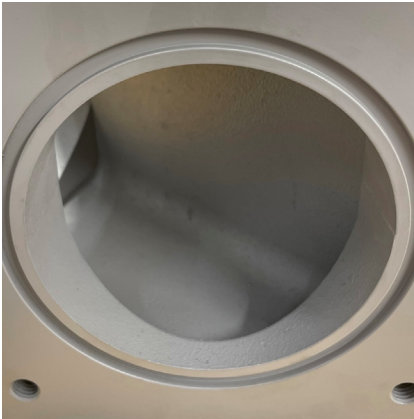


DOC11801

Neutral


3. Turn the valve cone CW until the valve cone is in the middle position. See middle illustration.
4. Push the upper cam of the camshaft and turn it CW until the upper micro switch is activated. Release the cam.

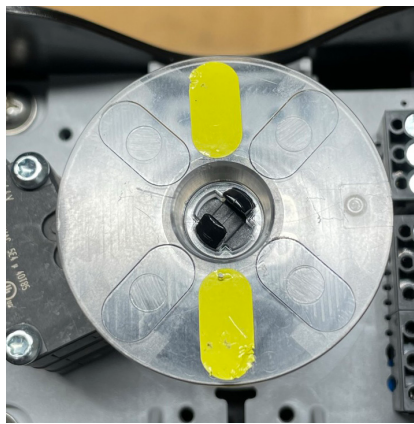

DOC11802

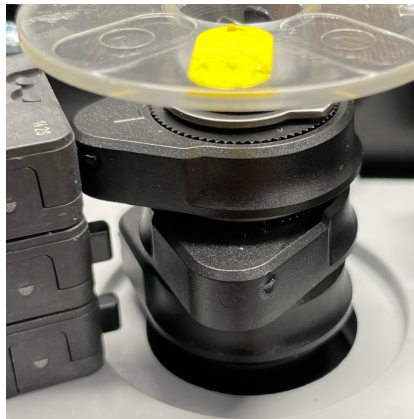


DOC11803

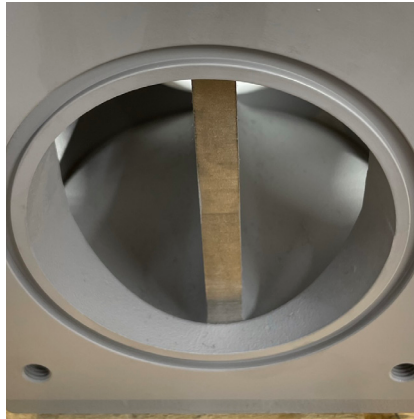

DOC11804

Discharge

5. Turn the valve cone CW until the valve cone is in the max position. See below right illustration.
6. Push the middle cam of the camshaft and turn it CW until the upper micro switch is activated. Release the cam.

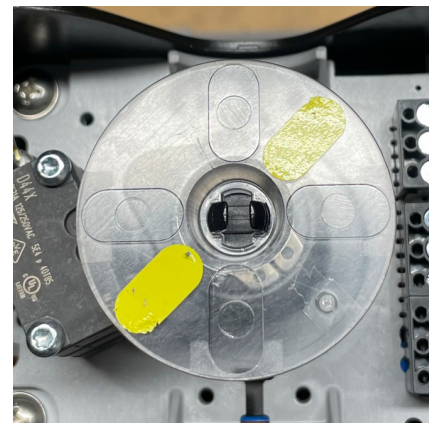

DOC11807




DOC11806




DOC11805

3.3 Positions - Pneumatic actuator

By connecting compressed air to connection 4 on the 4way valve. See below.

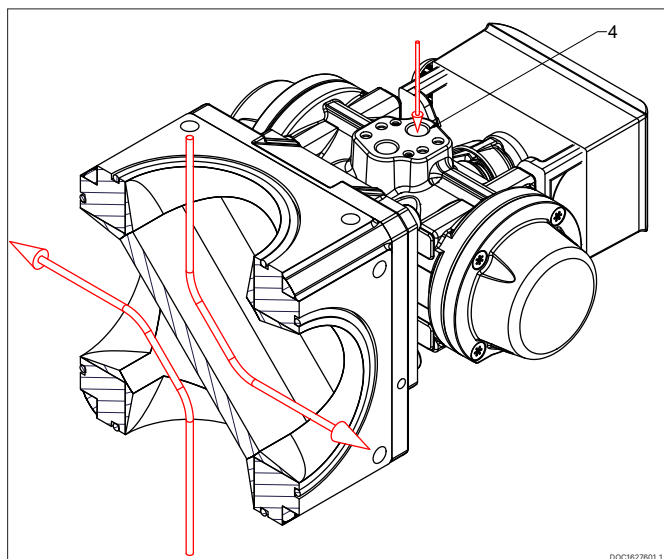


By connecting compressed air to connection 2 on the 4-way valve. See below.

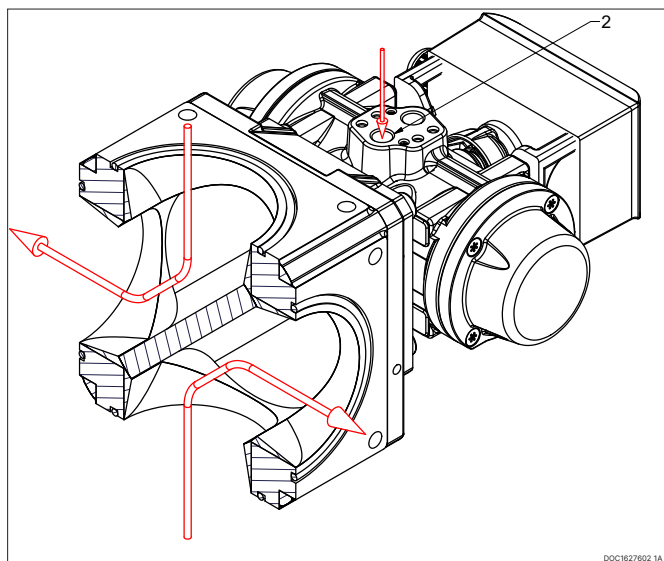


3.4 Positions - With handle bar

Position A achieved by turning the handle clockwise (CW). See below.

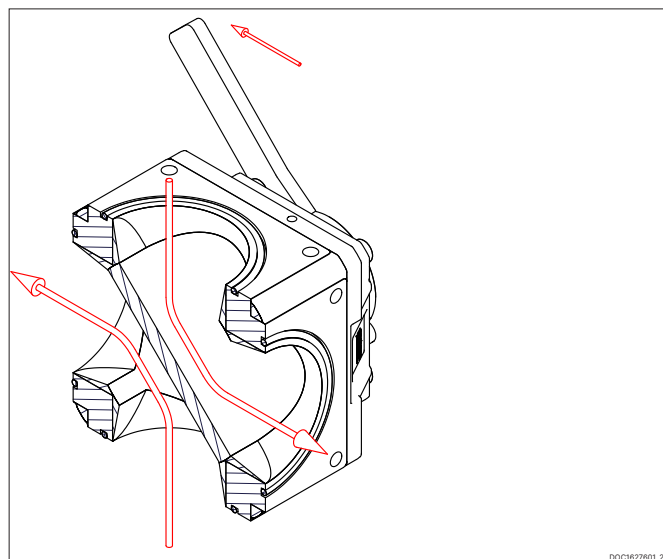


Position B achieved by turning the handle counter clockwise (CCW). See below.

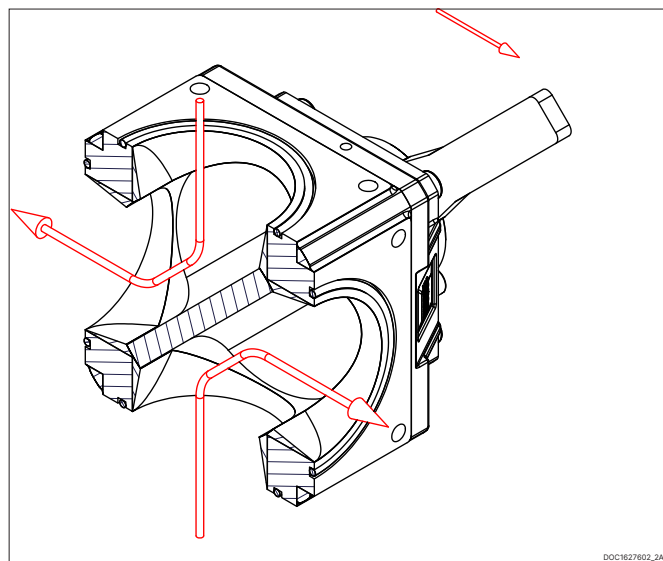


3.5 Placing the 4way valve

- The 4way valve must be installed with the valve spindle shaft horizontally. See illustration below. All horizontal positions are allowed.
- Do NOT install the 4way valve with the valve spindle shaft vertically. See illustration below. All vertical positions are prohibited.

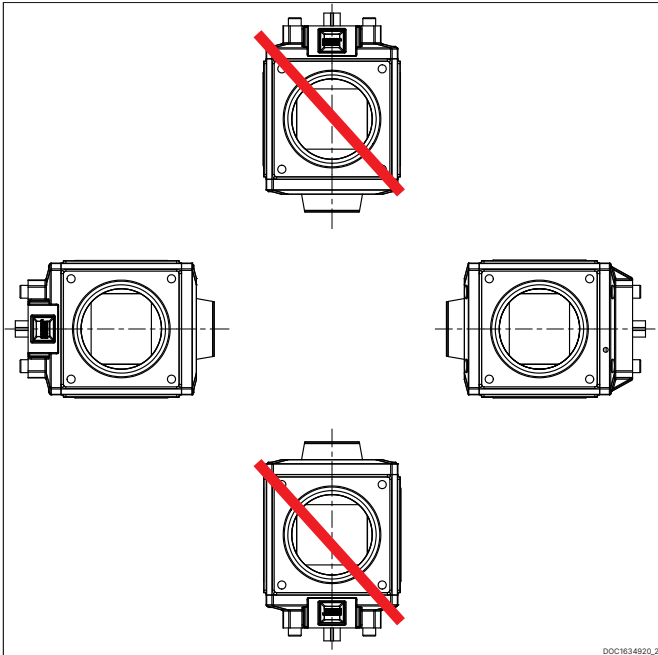

3.7 Flange connections

Deflection on the flanges from the welding process can affect the tolerances inside the valve and block the cones free rotation. Therefore it's important to use machined flanges or alternatively use maximum 8 mm flanges. See below illustration.

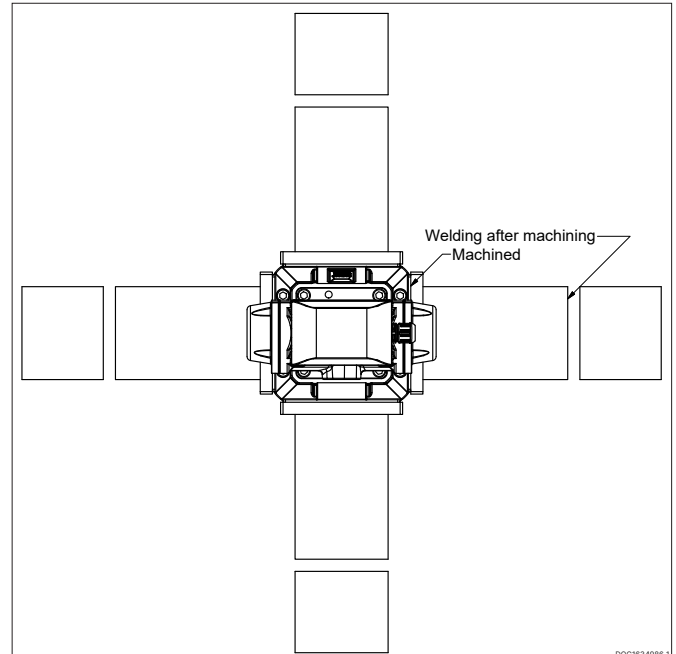

3.6 Securing the 4way valve

The following is primarily for when the valve is used in ATEX area.



External effects on the 4way valve may lead to leakage and, as a result, a potential risk of explosion. Foreign objects must not generate sparks.



- Gaskets to be handled with highest degree of caution.
- Gasket and sealing surfaces must be cleaned before assembly and without damage.
- If the tolerance for securing the 4way valve is not observed, there is a risk of damage and of potential explosion.
- Be aware of static electricity, the 4way valve must be grounded if necessary.
- Read Chapter 3.7

The 4way valve must be installed on a stable foundation, which must be level and stable, so that the 4way valve is not twisted or exposed to a ± 0.1 mm profile distortion.

Bolts must be tightened in accordance with supplier's instructions.

Ensure that the flow direction is correct before assembly.

The 4way valve's end stop can only be used as a stop when operating with manual handle bar. When activated with a cylinder, the cylinder's own end stop must be used.

4 Service, maintenance & inspection intervals



A failure to meet these specifications may result in damage to the 4way valve



A failure to observe the inspection intervals described in table below, may result in damage to the 4way valve and a potential risk of explosion.

Only qualified personnel may carry out repairs. The qualified person shall have the following knowledge:

- Knowledge of methods of protection. (For ATEX approved only)
- Knowledge of area classification. (For ATEX approved only)
- Knowledge of installation practices. (For ATEX approved only)

Repairs must be carried out according to manufacturer recommendations. If these are not followed, the ATEX declaration is not valid.

Use only original materials and components as described, during repair and maintenance.

During repair or disassembly, check that the flow direction remains unchanged.

For repair of the actuator, see accompanying supplier instructions.

Section	Operation	Standard ATEX Category 1 & 2	
4.1	Visually inspect for leakage	NA	Weekly
4.2	Inspection and cleaning	NA	Monthly
4.3	Lubrication	Monthly	Monthly

4.1 Inspecting for leakage


The 4way valve and pipe system around, must be inspected for leakage once a week. The inspection must be performed when the 4way valve is both operating and idle. Any leaks must be repaired before operation may continue.

4.2 Inspection and cleaning

The pipe connections of 4way valves must be inspected at least once a month, and any contaminants must be removed. The 4way valve must always run easily and effortlessly, otherwise it must be cleaned.

4.3 Lubrication

The 4way valve must be greased according to grease interval in order to prevent the 4way valve getting stuck. The amount of grease is approx. 20 grams in each grease nipple. See illustration below.

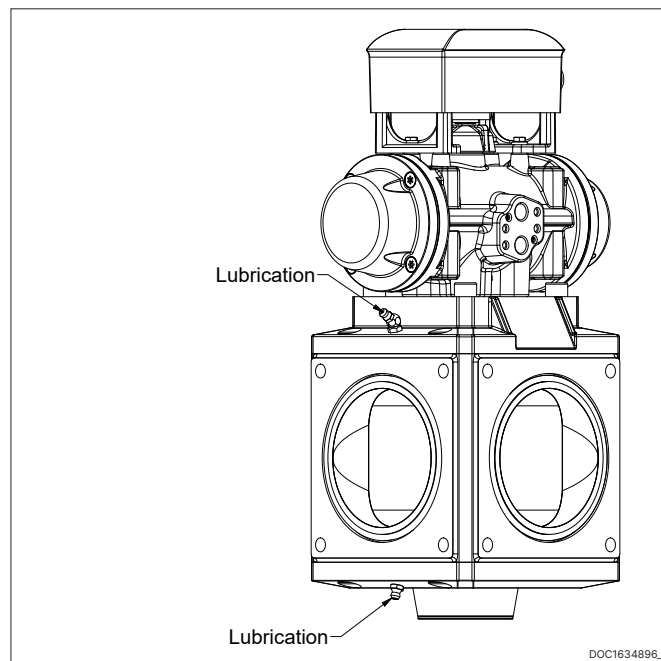

4.4 Marking and identification

The 4way valve is equipped with an Serial No. as shown below.

